


T40K

Motor Mount: SAE "C" 4 Bolt
Motor: 211.5cc Bi - Directional Speed
Min. Hydraulic Flow: 20 GPM (US)
Max. Hydraulic Flow: 60 GPM (US)
Max. Continuous Pressure: 3000 psi
Output Shaft: 4" Square

Output Speed (Low Speed)		Output Torque (High Torque)	
Flow GPM (US)	Speed RPM	Pressure PSI	Torque FT/LBS
20	3.4	1500	20255
30	5.1	2000	27006
40	6.8	2500	33758
60	10.2	3000	40509
Output Speed (High Speed)		Output Torque (Low Torque)	
Flow GPM (US)	Speed RPM	Pressure PSI	Torque FT/LBS
20	7.4	1500	9347
30	11.1	2000	12462
40	14.8	2500	15578
60	22.2	3000	18694

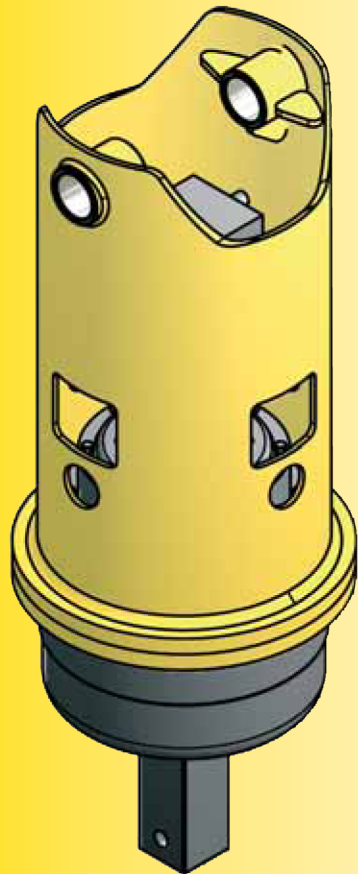


MODEL T40K

MODEL T40K

Pro-Dig "T" Series are a Two Speed shift on the fly unit giving exceptional productivity benefits. They are available in the following options.

1. Manual Switching - Controlled remotely by cab mounted switch

2. Auto Kickdown - The unit always starts in a High Speed-Low Torque Mode as the system builds pressure generated by ground conditions the unit will automatically switch into a High Torque - Low Speed Mode. The Kickdown system can be adjusted to suit the operators preference.

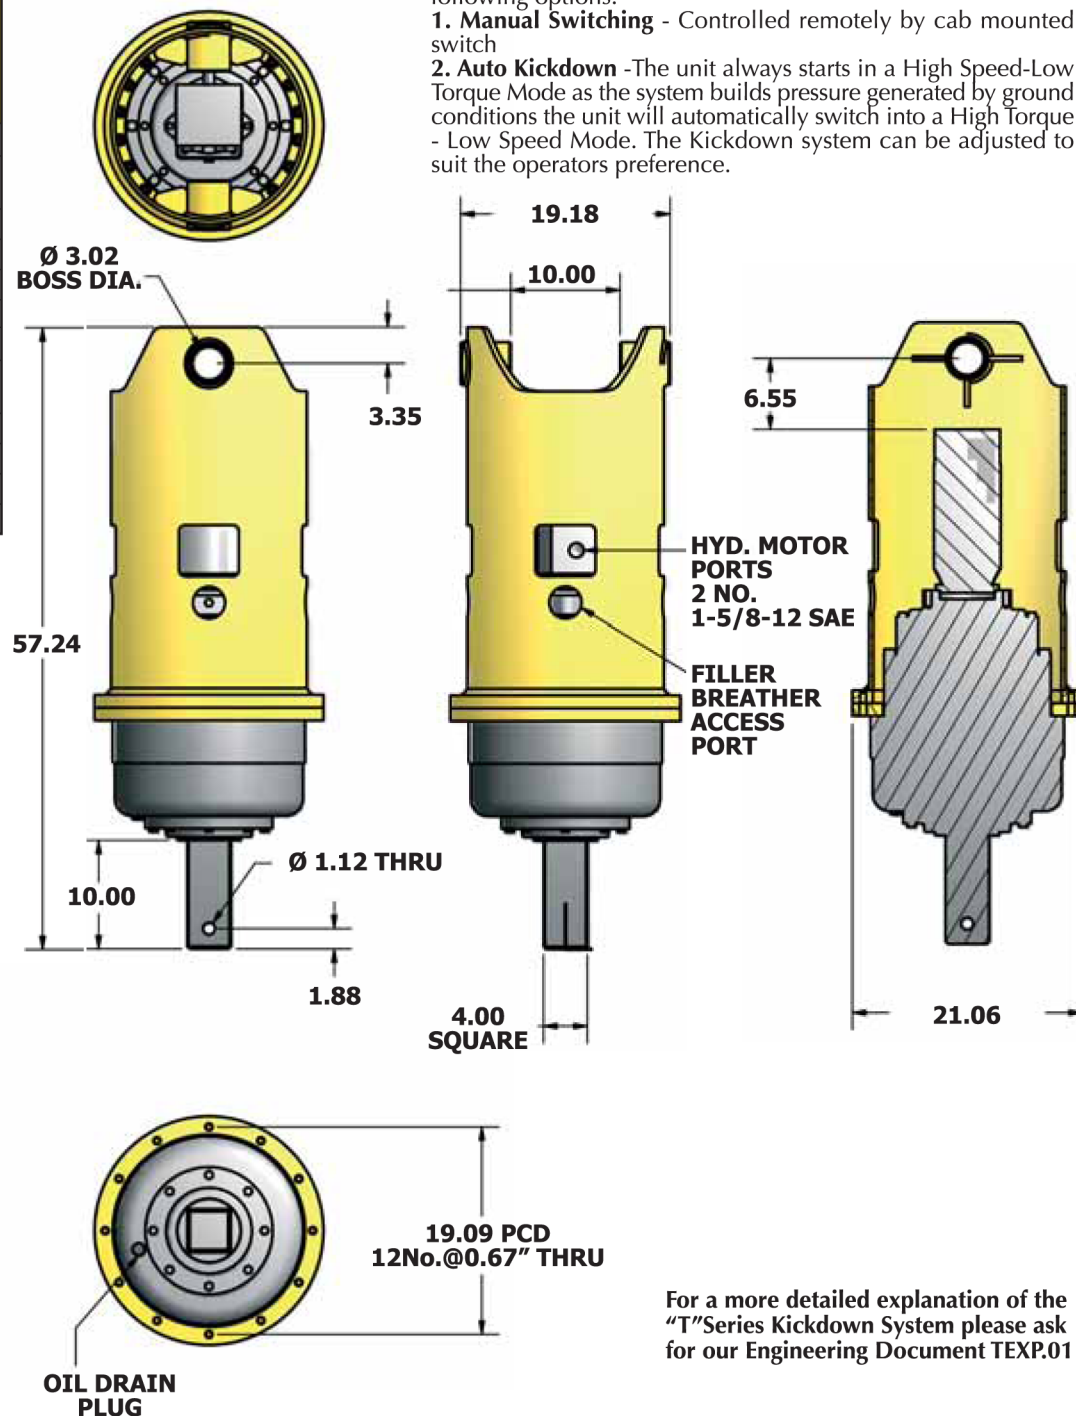

For a more detailed explanation of the "T" Series Kickdown System please ask for our Engineering Document TEXP.01