


MODELS X7K5, X9K5, X12K5



Ø 1.52
BOSS DIA.

11.54
6.38

HYD.
MOTOR
PORTS
2 No.
1-5/16 -
12SAE

FILLER
BREATHER
ACCESS
PORT

2.76


Ø 0.79 THRU

11.81

2.50
HEX

2.00

6.21



11.02 PCD
12No@0.51" THRU

OIL DRAIN
PLUG

X7K5

Motor Mount: SAE "CC" 4 Bolt
Motor: 251.0cc Bi - Directional Speed
Min. Hydraulic Flow: 10GPM (US)
Max. Hydraulic Flow: 35 GPM (US)
Max. Continuous Pressure: 3000 psi
Output Shaft: 2-1/2" Hex

Output Speed		Output Torque	
Flow GPM (US)	Speed RPM	Pressure PSI	Torque FT/LBS
10	8	1000	2548
15	12	1500	3822
25	20	2250	5733
35	28	3000	7644

X9K5

Motor Mount: SAE "CC" 4 Bolt
Motor: 315.0cc Bi - Directional Speed
Min. Hydraulic Flow: 10GPM (US)
Max. Hydraulic Flow: 35 GPM (US)
Max. Continuous Pressure: 3000 psi
Output Shaft: 2-1/2" Hex


Output Speed		Output Torque	
Flow GPM (US)	Speed RPM	Pressure PSI	Torque FT/LBS
10	6.4	1000	3221
15	9.5	1500	4831
25	16	2250	7247
35	22	3000	9663

X12K5

Motor Mount: SAE "CC" 4 Bolt
Motor: 400.0cc Bi - Directional Speed
Min. Hydraulic Flow: 10GPM (US)
Max. Hydraulic Flow: 40 GPM (US)
Max. Continuous Pressure: 3000 psi
Output Shaft: 2-1/2" Hex

Output Speed		Output Torque	
Flow GPM (US)	Speed RPM	Pressure PSI	Torque FT/LBS
10	5.2	1000	4204
20	10.3	1500	6306
30	15	2250	9459
40	21	3000	12612

PRO-DIG
Reliability Under Pressure

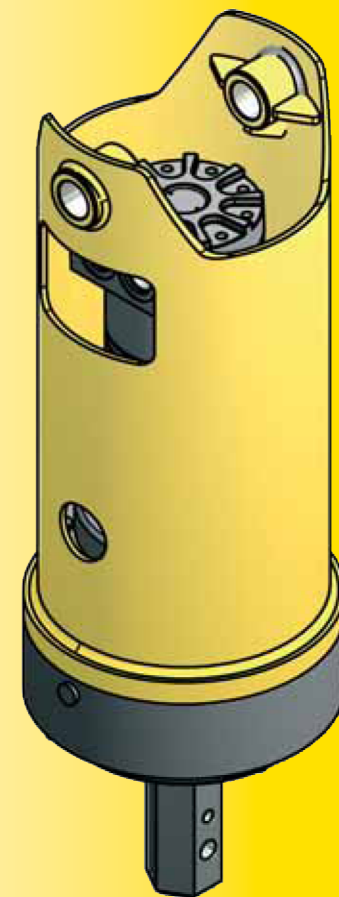

MODELS
X7K5
X9K5
X12K5