


MODELS X1K2, X1K5, X1K9

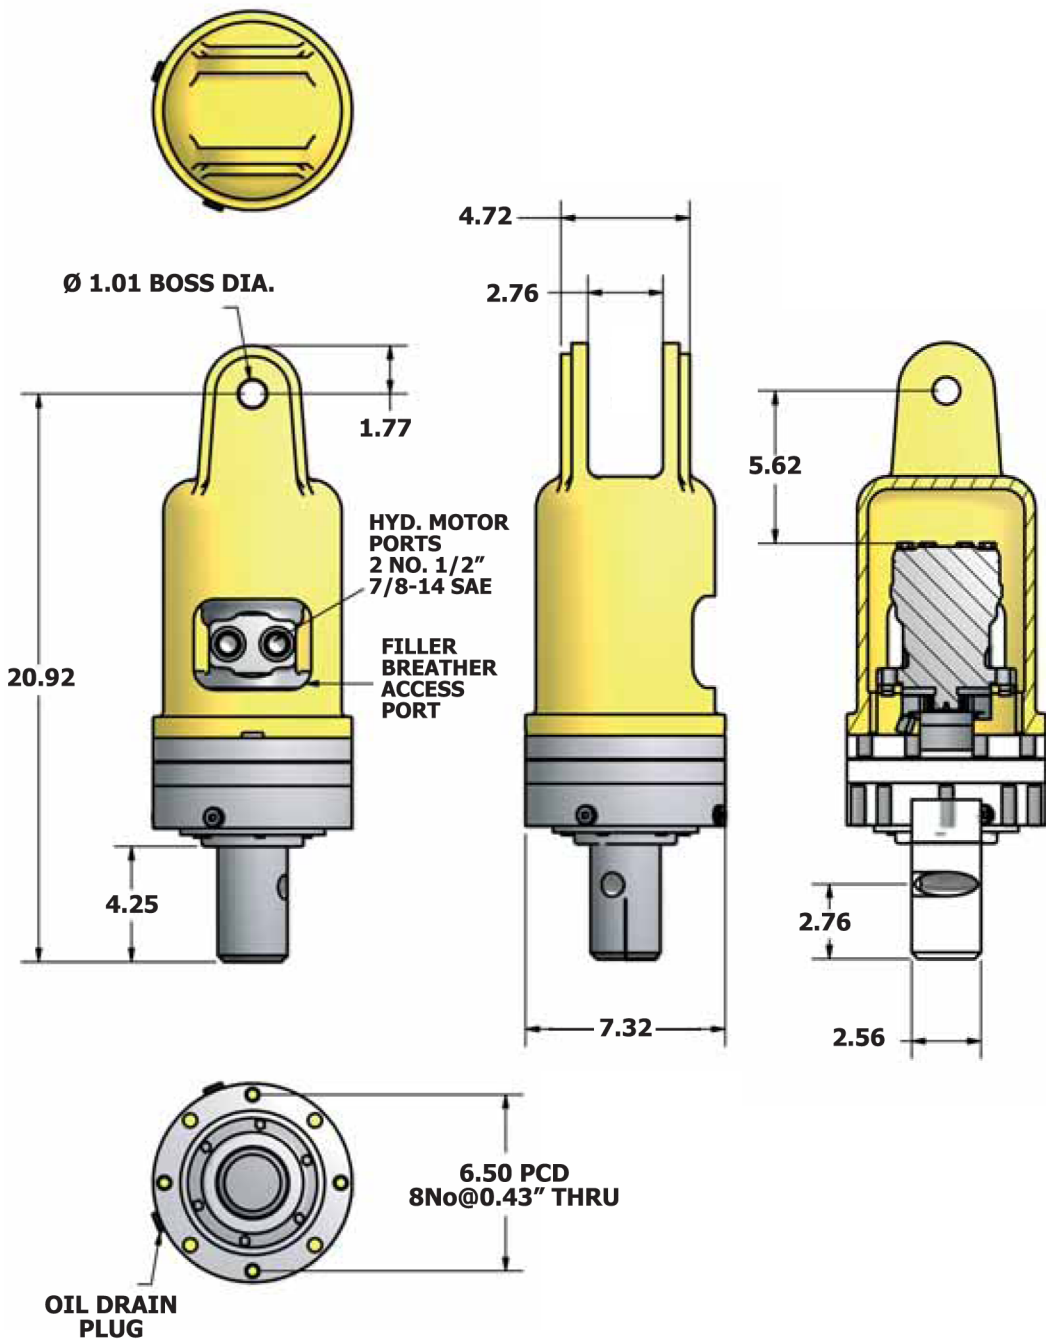

THIS MODEL IS ALSO AVAILABLE
WITH A 2" HEXAGONAL SHAFT

X1K2

Motor Mount: SAE "B" 2 Bolt
Motor: 99.8cc Bi - Directional Speed
Min. Hydraulic Flow: 5 GPM (US)
Max. Hydraulic Flow: 20 GPM (US)
Max. Continuous Pressure: 3000 psi
Output Shaft: 2" Hex

Output Speed		Output Torque	
Flow GPM (US)	Speed RPM	Pressure PSI	Torque FT/LBS
5	28	1000	395
10	56	1500	593
15	84	2250	889
20	111	3000	1186

X1K5

Motor Mount: SAE "B" 2 Bolt
Motor: 124.1cc Bi - Directional Speed
Min. Hydraulic Flow: 5 GPM (US)
Max. Hydraulic Flow: 20 GPM (US)
Max. Continuous Pressure: 3000 psi
Output Shaft: 2" Hex


Output Speed		Output Torque	
Flow GPM (US)	Speed RPM	Pressure PSI	Torque FT/LBS
5	23	1000	507
10	46	1500	761
15	69	2250	1141
20	92	3000	1521

X1K9

Motor Mount: SAE "B" 2 Bolt
Motor: 155.4cc Bi - Directional Speed
Min. Hydraulic Flow: 5 GPM (US)
Max. Hydraulic Flow: 20 GPM (US)
Max. Continuous Pressure: 3000 psi
Output Shaft: 2" Hex

Output Speed		Output Torque	
Flow GPM (US)	Speed RPM	Pressure PSI	Torque FT/LBS
5	18	1000	630
10	37	1500	946
15	55	2250	1419
20	73	3000	1891

PRO-DIG
Reliability Under Pressure

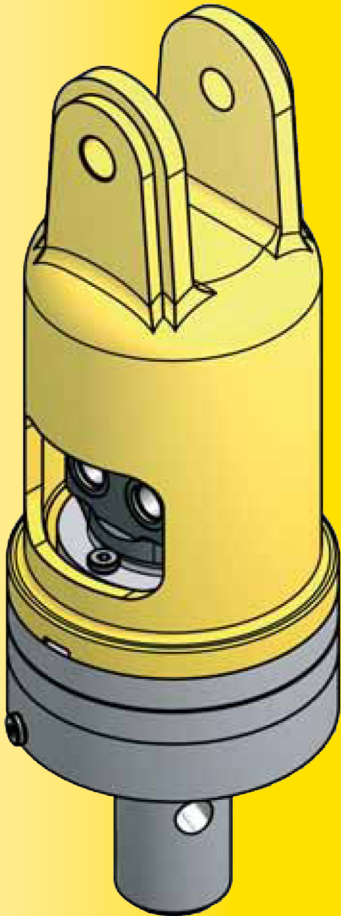

MODELS
X1K2
X1K5
X1K9