
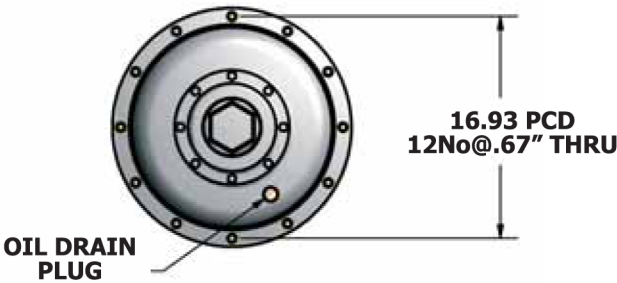
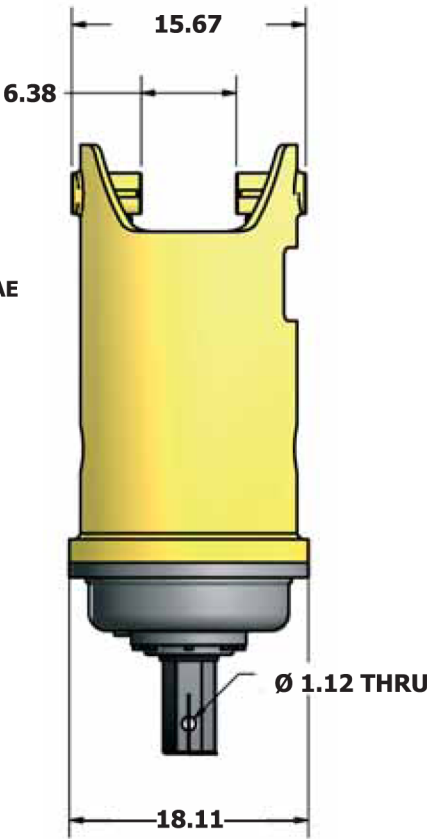
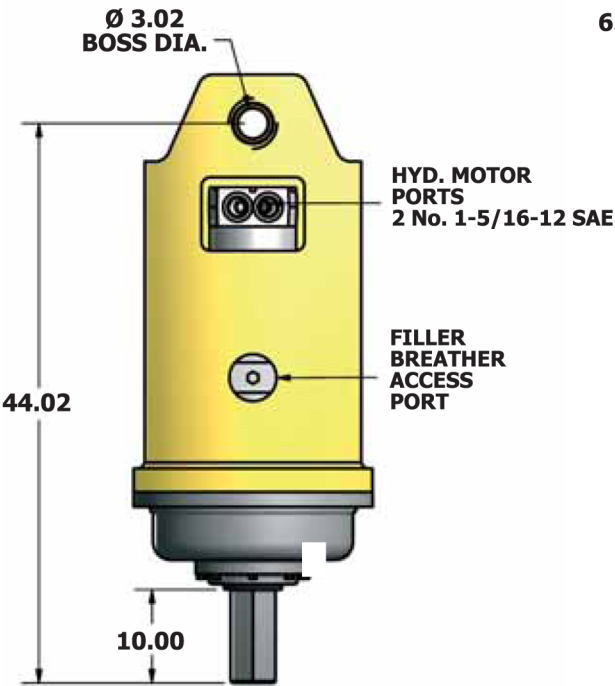



MODEL X30K




X30K

Motor Mount:	SAE "CC" 4 Bolt
Motor:	500.0cc Bi - Directional Speed
Min. Hydraulic Flow:	10GPM (US)
Max. Hydraulic Flow:	40 GPM (US)
Max. Continuous Pressure:	3000 psi
Output Shaft:	4" Square

Output Speed		Output Torque	
Flow GPM (US)	Speed RPM	Pressure PSI	Torque FT/LBS
10	2.1	1000	10187
20	4.2	1500	15281
30	6.4	2250	22921
40	8.5	3000	30562

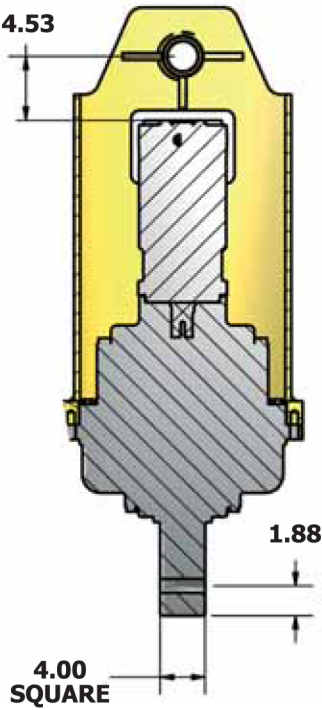

PRO-DIGTM
Reliability Under Pressure

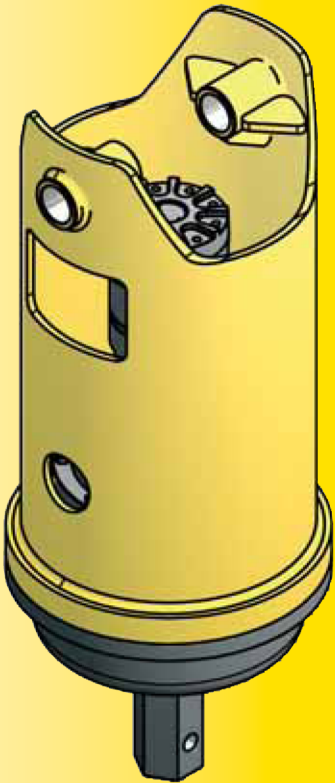

MODEL
X30K